

| Product profile | |
|---|--|
| Part number | 2016-0025 |
| Article name | BioShake D30 elm |
| Description | Automation friendly Shaker with Edge Locking Mechanism. Designed to be integrated in liquid handling and automation platforms to process labware in chemical and biological laboratories. |
| Recommended use | Automation Shaking Microplates, DW plates, Extraction protocol |
| Scope of delivery | BioShake D30 elm External power supply Power cords Europe & US 2x screws to mount device (M3 x 18 DIN 912) Calibration certificate Operation & Integration manual |
| Conforming use | System is operated by qualified and trained research and laboratory personnel. Applicable safety standards or rules need always be fulfilled. |
| Country of origin | DE |
| Customs tariff code | 8479 82 00 |
| Mixing | |
| Mixing frequency range | 200 to 2000 rpm with 1 rpm increment resolution |
| Maximum frequency* | < 225 g: 2000 rpm < 300 g: 1800 rpm < 500 g: 1500 rpm > 500 g: 1000 rpm |
| Mixing orbit | constant 3.0 mm diameter |
| Mixing regulation accuracy | ± 25 rpm |
| Accel. / Decel. range | 1 - 30 seconds with 1 second increment resolution |
| Zero position | Locked zero position with ± 0.1 mm accuracy |
| <i>* Feasible frequency heavily depends on load weight and height. Always start with low frequencies and iterate upwards.</i> | |
| ELM positioning | |
| Description | Patented Edge Locking Mechanism (elm) for repeatable and accurate positioning of microplates on a liquid handling or automation platform. With the elm, labware can either easily be exchanged manually/automatically or it is strongly fixed in a diagonal centered position. |
| ELM position accuracy | ± 0.1 mm |
| Device control | |
| Description | Required electronic for remote control is build in the device. No external controller required. |
| Operation control | Remote controlled as described in the Integration Manual |
| Peripheral interface | EIA-232 / RS-232 interface (2 m cable with RS-232 plug-in connector) optional: USB via USB-Serial Adapters (Rec. DIGITUS DA-70156) or USB via MOXA USB-to-Serial Hub |
| Status | LED in front (GREEN = ok RED = error) |
| Electrical | |
| Operating voltage | 24 V DC Imax: 3.1 A Peff: 15 Watt Pmax: 75 Watt |
| Power supply | Input: 100 - 240 V AC 50 - 60 Hz Output: 24 V DC Imax: 5.0 A Pmax: 120 Watt External power supply unit (CE/UL/CSA approved, 85-264 V AC, 47-63 Hz, IEC/EN60320-1 C14 Degree of protection: IP20) |
| Power connection* | Prewired cable length 2 m barrel connector ID 2.5 mm x OD 5.5 mm |
| <i>* Only use the device with the delivered power cord. If another power cord is used ensure the wire diameter is adequate.</i> | |
| Operating, transport and storage conditions | |
| Operating range | 5 °C - 45 °C (41 - 113 F) 10 - 80 % RH up to 2000 m above sea level non-condensing |
| Floor base requirements | stable (resonance free) horizontal dry inside buildings even |
| Transportation and storage | -10 °C - 60 °C (14 - 140 F) 10 - 80 % RH non-condensing |
| General properties | |
| Housing material | Aluminum anodized |
| Degree of protection | IP20 (Protected against solid objects up to 12 mm No protection against water) |
| Pollution degree | 1 (no contamination or only dry, non-conductive contamination, whereby the contamination has no influence) |
| Airborne sound emission | < 70 db (A) |


Dimension and weight

| | |
|------------------|---|
| Dimensions | (W x D x H) 142 x 99 x 55.35 mm 5.59 x 3.9 x 2.18 inch |
| Weight | 1.6 kg 3.53 lbs |
| Packaging size | (W x D x H) 347 x 252 x 131 mm 13.66 x 9.92 x 5.16 inch cardboard box |
| Packaging weight | 3 kg 6.61 lbs |

Certifications

| | |
|-----------------------|---|
| Regulatory compliance | 2014/30/EU, 2015/863/EU, 2011/65/EU, DIN EN 61010-1:2020-03, DIN EN 61010-2-051:2016-02, DIN EN 61326-1:2013-07, DIN EN 55011:2017-03, DIN EN IEC 63000:2019-05 |
| Patents pending | WO2008135565, US8323588, EP2144716, WO2011113858, US9126162, EP2547431, WO2013113847, US10052598, EP2809436, WO2013113849, US9371889, EP2809435, WO2014207243, US20160368003, EP3013480, WO002022128814A1, WO002022128809A2 Please notify us or our designated agent, if you believe that a user has infringed our intellectual property rights. |

Drawing

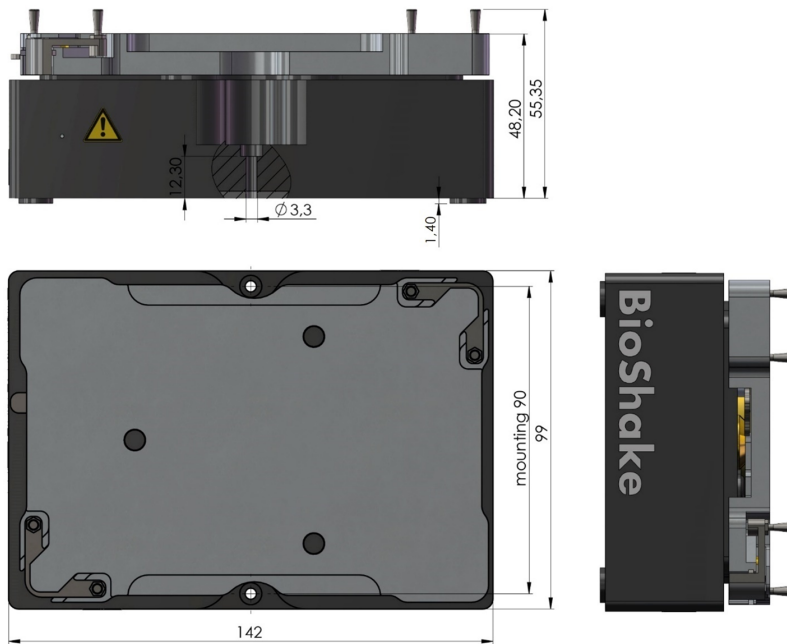

TECHNICAL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE