

**Product profile**

Part number	1808-0505
Article name	BioShake XP
Description	The BioShake XP is a high-speed lab shaker that lets you perform all your standard runs with a minimum of adjustments, and offers outstanding performance to handle a wide range of applications across biotechnology, pharmaceutical and academic research.
Recommended use	Lab Bench   Shaking   Tubes, Vials, Microplates
Scope of delivery	BioShake XP   External power supply   Power cords Europe & US   Calibration certificate   Operation manual
Conforming use	System is operated by qualified and trained research and laboratory personnel. Applicable safety standards or rules need always be fulfilled.
Country of origin	DE
Customs tariff code	8479 82 00

**Mixing**

Mixing frequency range*	200 to 3000 rpm with 50 rpm increment resolution
Mixing orbit	constant 2.0 mm diameter
Mixing regulation accuracy	± 25 rpm
Short-Mix function	Yes

\* Feasible frequency heavily depends on load weight and height

**Adapter plates for different labware**

Description	An adapter is required for fixation of tubes and vials and recommended for some microplates. The adapter needs to be purchased separately and can be exchanged by the user.
Microplates	All microplates according ANSI-SLAS format 4-, 6-, 8-, 12-, 24-, 48-, 96-, 384-, and 1536-well microplates, deep well plates, PCR plates
Tubes and Vials	0.2, 0.5, 1.5, 2.0 ml standard tubes   2.0, 4.0, 6.0, 8.0, 10.0 ml cylindrical shaped vials
Others	Custom made adapter on request

**Device control**

Operation control	Device control is realized via a 8 button keypad. The parameters Time   Mixing frequency can be set directly.
Display	2x 16 digits blue LCD with backlight
Status	All status information are shown on the LCD
Timer setting	1 min - 99 h with audible alarm at the end of the process
Programming	2 separate programs with 3 steps each can be defined and saved in the internal memory

**Electrical**

Operating voltages	24 V DC   I <sub>max</sub> : 3.1 A   P <sub>eff</sub> : 15 Watt   P <sub>max</sub> : 75 Watt
Power supply	Input: 100 - 240 V AC   50 - 60 Hz Output: 24 V DC   I <sub>max</sub> : 5.0 A   P <sub>max</sub> : 120 Watt External power supply unit (CE/UL/CSA approved, 85-264 V AC, 47-63 Hz, IEC/EN60320-1 C14   Degree of protection: IP20)
Power connection*	Barrel connector ID 2.5 mm x OD 5.5 mm

\*Only use the device with the delivered power cord. If another power cord is used ensure the wire diameter is adequate.

**Operating, transport and storage conditions**

Operating range	5 °C - 45 °C (41 - 113 F)   10 - 80 % RH   up to 2000 m above sea level   non-condensing
Floor base requirements	stable (resonance free)   horizontal   dry   inside buildings   even
Transportation and storage	-10 °C - 60 °C (14 - 140 F)   10 - 80 % RH   non-condensing

TECHNICAL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE!

---

**General properties**

---

Housing material	Aluminum anodized
Degree of protection	IP20 (Protected against solid objects up to 12 mm   No protection against water)
Pollution degree	1 (no contamination or only dry, non-conductive contamination, whereby the contamination has no influence)
Airborne sound emission	< 70 db (A)

---

**Dimension and weight**

---

Dimensions	(W x D x H) 142 x 169 x 88 mm   5.59 x 6.65 x 3.46 inch
Weight	2.7 kg   5.95 lbs
Packaging size	(W x D x H) 495 x 260 x 100 mm   19.49 x 10.24 x 3.94 inch   cardboard box
Packaging weight	3 kg   6.61 lbs

---

**Certifications**


---

Regulatory compliance	2014/30/EU, 2015/863/EU, 2011/65/EU, DIN EN 61010-1:2020-03, DIN EN 61010-2-051:2016-02, DIN EN 61326-1:2013-07, DIN EN 55011:2017-03, DIN EN 50581:2013-02 (based on)
Patents pending	WO2008135565, US8323588, EP2144716, WO2011113858, US9126162, EP2547431, WO2013113847, US10052598, EP2809436, WO2013113849, US9371889, EP2809435, WO2014207243, US20160368003, EP3013480, WO002022128814A1, WO002022128809A2 Please notify us or our designated agent, if you believe that a user has infringed our intellectual property rights.

---

**Drawing**

---

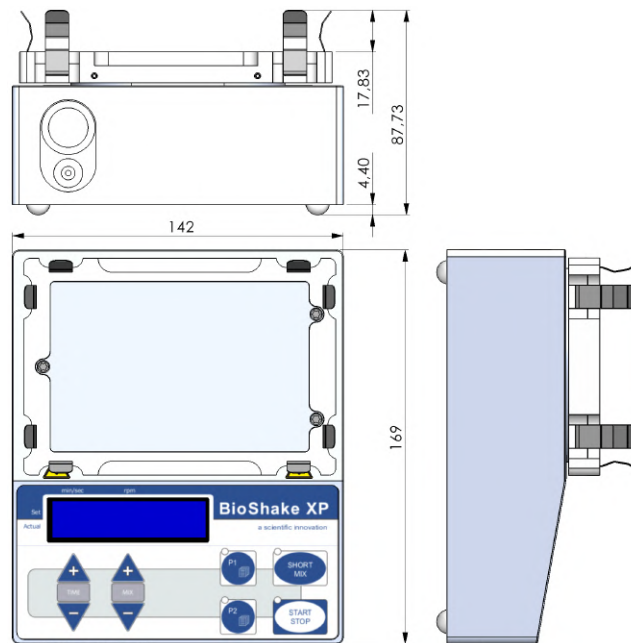

TECHNICAL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE